

Model ALS04

Section 1

Travel 13"



With a small footprint (20" x 41") the ALS04 material handling lift is ideal for use as a cart lift, providing accurate positioning of material for easy access at the desired working height, helping to improve ergonomics. EnKon's ALS04 air scissor lift table has a travel of 13" and a raised height of 20".

Standard Features

- **100% air operated** for low maintenance, ease of use, and work environment safety
- **Low profile** accommodates a wide range of worker heights and applications
- **Modular design** is easily customizable to application specifications
- **High-strength steel, welded construction** built to safety factors required by customer application and in compliance with ANSI MH29.1-1994
- **High capacity lifting** up to 57,000 lbs (25,855 kg)
- **Variable duty cycles** from low to high for cost flexibility to fit each application
- **Self-lubricating PTFE overlay** on bearings at all pivot points for high loads and long life
- **Captured wheel guides** to prevent top and bottom lift platforms from tipping
- **Stackable lift modules** for added lift travel
- **Patented direct one-to-one lift ratio** in which the air bag supplies all of the lifting power, resulting in less stress on the scissors and increased lift longevity
- **Virtually maintenance-free** for low-cost operation and minimal downtime
- **Safety pressure release** helps prevent the air bag from overinflating
- **Enamel-based acrylic paint** applied to all surfaces after being cleaned and primed
- **Clean and green technology** for a cleaner and safer work environment

Options

- **Lockout valve and filter regulator** enhances performance of the air supply
- **Piloted internal valves with check valves** prevent undesired lift descent
- **Portability kits** allows lift system to be moved with ease
- **High speed capability** with a full cycle in under 10 seconds
- **Safety skirting** to protect from pinch points and debris

Continued ↓

Model ALS04

Section 1


Travel 13"



Nomenclature

Product Type: A-Series Lift Scissor
Lift Style: 04
Capacity: 30 = 3000 lbs
Raised Height: 20"
Platform Size: 20" width x 41" length

Model ALS 04-30-20-2041

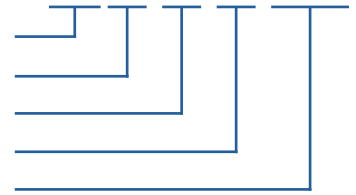

Travel in	Model	Capacity lbs	Lowered Height in	Travel in	Raised Height in	Platform Size ⁵		Base Size ⁵ in x in	Ship Weight ¹ lbs
						Width in	Length in		
13	ALS04-10-20-2041	1000	7	13	20	20 - xx	41 - xx	20 x 41	290
13	ALS04-20-20-2041	2000	7	13	20	20 - xx	41 - xx	20 x 41	290
13	ALS04-30-20-2041	3000	7	13	20	20 - xx	41 - xx	20 x 41	290

Values rounded to the nearest 1", see drawing for actual dimensions.

Notes

- 1 Ship weights are estimated and do not include oversize platforms or options
- 2 Maximum air bag pressure is 50 psi or 100 psi depending on air bag type
- 3 Recommended air line feed pressure is 70 psi to 100 psi
- 4 Air consumption is 5 cubic feet per minute (cfm) on average based on cycle rate
See the EnKon Systems website for how to calculate cfm for your application
URL: <http://enkon.pro/blog/calculating-cfm-and-scfm-for-pneumatic-scissor-lift-tables/>
- 5 Width and length dimensions reference the main structure of the lift system and do not include structures such as floor tabs, bolt heads, etc. See drawing for actual dimensions
- 6 Surface finishes are either powder coat or low-VOC quick-dry two-stage spray-on primer coat and hard enamel top coat
- 7 Lifts must be center loaded when at full capacity
- 8 Side and end load capacities are derated 2% per inch of increase top plate size from base size
- 9 Safety bellow skirting option must be purchased to meet ANSI and OSHA standards

Continued ↓

Model ALS04 Options

Section 1

Travel 13"

Rotate Options

- 16956 Rotate high grade bearing - no detent
- 14618 Rotate high grade bearing - w/spring detent



EnKon.pro

With 14618

Control Options

- 12086 Hand control valve
- 12522 Hand pedestal control valve
- 12169 Foot pedal control valve
- 13657 Regulator filter gauge with lockout / tag out (For hand controls)
- 16997 Regulator filter gauge with lockout / tag out (For foot controls)
- 13627 Regulator filter gauge (For hand controls)
- 16999 Regulator filter gauge (For foot controls)
- 13628 Lockout / tag out



EnKon.pro

With 12169
16997



EnKon.pro

With 12522

Solid Platform Options

		Lift	Rotate
13805	Platform - 20 x 41 x 1/4	✓	
13806	Platform - 48 x 48 x 3/8	✓	
16531	Platform - 48 x 48 x 3/8 With gussets on corners 4" x 4"	✓	
13807	Platform - 48 x 48 x 1/2	✓	
16957	Platform - 48 x 48 x 1/2 W/90° detents		✓
16958	Platform - 48 x 48 x 1/2 W/180° detents		✓
16959	Platform - 48 x 48 x 1/2 W/180° detents With gussets on corners 4" x 4"		✓
13784	Platform - 36 x 48 x 1/2 - no detents		✓
13687	Platform - 48 x 48 x 1/2 - no detents		✓
-	Platform - Custom sizes (material: high strength hot rolled steel)		
-	Platform - Custom sizes (material: stainless steel)		



EnKon.pro

With 13806



EnKon.pro

With 16531



EnKon.pro

With 16959



EnKon.pro

With 1006951

Safety Skirting Options

- 1006951 Skirt - ALS04

Portable Options

- 13822 Portable dolly handle (1000, 2000, 3000 pounds)
- 13825 Portable caster cart with floor lock (1000, 2000, 3000 pounds)
- 13826 Portable fork pockets (adds 4" to height)



EnKon.pro

With 13822



EnKon.pro

With 13825



EnKon.pro

With 13826