

### Model LSA11

Section 27

Travel 25"



Offering a nearly 12 foot long platform, the LSA11 Air Scissor Lift Table raises up to 15,000 lbs. The 36" x 141" platform has a raised height of 29" with a 4" profile, and 25" travel providing one-to-one, direct-lifting operation. The LSA11 air scissor lift table takes our powerhouse LSA07 and triples it, placing three powerful lifts end-to-end under the platform.

Popular with bus/truck manufacturing and assembly applications, the LSA11 has also been used with irrigation piping automation. This lift is also easily integrated with transfer conveyor systems.

#### Standard Features

- **100% air operated** for low maintenance, ease of use, and work environment safety
- **Low profile** accommodates a wide range of worker heights and applications
- **Modular design** is easily customizable to application specifications
- **High-strength steel, welded construction** built to safety factors required by customer application and in compliance with ANSI MH29.1-1994
- **High capacity lifting** up to 57,000 lbs (25,855 kg)
- **Variable duty cycles** from low to high for cost flexibility to fit each application
- **Self-lubricating PTFE overlay** on bearings at all pivot points for high loads and long life
- **Captured wheel guides** to prevent top and bottom lift platforms from tipping
- **Stackable lift modules** for added lift travel
- **Patented direct one-to-one lift ratio** in which the air bag supplies all of the lifting power, resulting in less stress on the scissors and increased lift longevity
- **Virtually maintenance-free** for low-cost operation and minimal downtime
- **Safety pressure release** helps prevent the air bag from overinflating
- **Enamel-based acrylic paint** applied to all surfaces after being cleaned and primed
- **Clean and green technology** for a cleaner and safer work environment

#### Options

- **Lockout valve and filter regulator** enhances performance of the air supply
- **Piloted internal valves with check valves** prevent undesired lift descent
- **Portability kits** allows lift system to be moved with ease
- **High speed capability** with a full cycle in under 10 seconds
- **Safety skirting** to protect from pinch points and debris

# Model LSA11

Section 27


Travel 25"



## Nomenclature

Product Type: Lift Scissor Air  
 Lift Style: 11  
 Capacity: 150 = 15000 lbs  
 Raised Height: 29"  
 Platform Size: 36" width x 141" length

Model LSA 11-150-29-36141

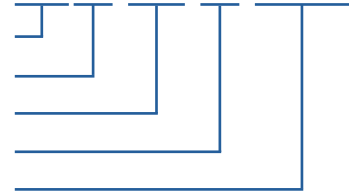

Travel in	Model	Capacity lbs	Lowered Height in	Travel in	Raised Height in	Platform Size <sup>5</sup>		Base Size <sup>5</sup> in x in	Ship Weight <sup>1</sup> lbs
						Width in	Length in		
25	LSA11-10-29-36141	1000	4	25	29	36 - xx	141 - xx	36 x 141	2450
25	LSA11-20-29-36141	2000	4	25	29	36 - xx	141 - xx	36 x 141	2450
25	LSA11-30-29-36141	3000	4	25	29	36 - xx	141 - xx	36 x 141	2450
25	LSA11-40-29-36141	4000	4	25	29	36 - xx	141 - xx	36 x 141	2450
25	LSA11-50-29-36141	5000	4	25	29	36 - xx	141 - xx	36 x 141	2450
25	LSA11-60-29-36141	6000	4	25	29	36 - xx	141 - xx	36 x 141	2450
25	LSA11-70-29-36141	7000	4	25	29	36 - xx	141 - xx	36 x 141	2450
25	LSA11-80-29-36141	8000	4	25	29	36 - xx	141 - xx	36 x 141	2450
25	LSA11-90-29-36141	9000	4	25	29	36 - xx	141 - xx	36 x 141	2450
25	LSA11-100-29-36141	10000	4	25	29	36 - xx	141 - xx	36 x 141	2450
25	LSA11-110-29-36141	11000	4	25	29	36 - xx	141 - xx	36 x 141	2450
25	LSA11-120-29-36141	12000	4	25	29	36 - xx	141 - xx	36 x 141	2450
25	LSA11-130-29-36141	13000	4	25	29	36 - xx	141 - xx	36 x 141	2450
25	LSA11-140-29-36141	14000	4	25	29	36 - xx	141 - xx	36 x 141	2450
25	LSA11-150-29-36141	15000	4	25	29	36 - xx	141 - xx	36 x 141	2450

Values rounded to the nearest 1", see drawing for actual dimensions.

## Notes

- 1 Ship weights are estimated and do not include oversize platforms or options
- 2 Maximum air bag pressure is 50 psi or 100 psi depending on air bag type
- 3 Recommended air line feed pressure is 70 psi to 100 psi
- 4 Air consumption is 5 cubic feet per minute (cfm) on average based on cycle rate  
See the EnKon Systems website for how to calculate cfm for your application  
URL: <http://enkon.pro/blog/calculating-cfm-and-scfm-for-pneumatic-scissor-lift-tables/>
- 5 Width and length dimensions reference the main structure of the lift system and do not include structures such as floor tabs, bolt heads, etc. See drawing for actual dimensions
- 6 Surface finishes are either powder coat or low-VOC quick-dry two-stage spray-on primer coat and hard enamel top coat
- 7 Lifts must be center loaded when at full capacity
- 8 Side and end load capacities are derated 2% per inch of increase top plate size from base size
- 9 Safety bellow skirting option must be purchased to meet ANSI and OSHA standards