

Model LSA36

Section 29

Travel 25"



Just under 10' long, with a raised height of 32", the LSA36 Pneumatic Scissor Lift Table provides heavy duty strength with the ability to lift up to 20,000 lbs. With its 44" x 104" platform, this powerhouse provides a raised height of 32", with a 7" profile and 25" of travel. Taking two LSA21s and placing them end-to-end, the LSA36 employs the power of four scissors.

Often used in the steel stamping industry for press loading and unloading, the LSA36 pneumatic lift is similar to our LSA27 air scissor lift table. The LSA36 is used for moving high-capacity loads including school buses, construction vehicles, trucks, and farm tractors during assembly.

Standard Features

- **100% air operated** for low maintenance, ease of use, and work environment safety
- **Low profile** accommodates a wide range of worker heights and applications
- **Modular design** is easily customizable to application specifications
- **High-strength steel, welded construction** built to safety factors required by customer application and in compliance with ANSI MH29.1-1994
- **High capacity lifting** up to 57,000 lbs (25,855 kg)
- **Variable duty cycles** from low to high for cost flexibility to fit each application
- **Self-lubricating PTFE overlay** on bearings at all pivot points for high loads and long life
- **Captured wheel guides** to prevent top and bottom lift platforms from tipping
- **Stackable lift modules** for added lift travel
- **Patented direct one-to-one lift ratio** in which the air bag supplies all of the lifting power, resulting in less stress on the scissors and increased lift longevity
- **Virtually maintenance-free** for low-cost operation and minimal downtime
- **Safety pressure release** helps prevent the air bag from overinflating
- **Enamel-based acrylic paint** applied to all surfaces after being cleaned and primed
- **Clean and green technology** for a cleaner and safer work environment

Options

- **Lockout valve and filter regulator** enhances performance of the air supply
- **Piloted internal valves with check valves** prevent undesired lift descent
- **Portability kits** allows lift system to be moved with ease
- **High speed capability** with a full cycle in under 10 seconds
- **Safety skirting** to protect from pinch points and debris

Model LSA36

Section 29


Travel 25"



Nomenclature

Product Type: Lift Scissor Air
 Lift Style: 36
 Capacity: 200 = 20000 lbs
 Raised Height: 32"
 Platform Size: 44" width x 104" length

Model LSA 36-200-32-44104

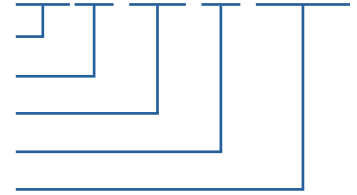

EnKon.pro™

Travel in	Model	Capacity lbs	Lowered Height in	Travel in	Raised Height in	Platform Size ⁵		Base Size ⁵ in x in	Ship Weight ¹ lbs
						Width in	Length in		
25	LSA36-40-32-44104	4000	7	25	32	44 - xx	104 - xx	44 x 104	3380
25	LSA36-50-32-44104	5000	7	25	32	44 - xx	104 - xx	44 x 104	3380
25	LSA36-60-32-44104	6000	7	25	32	44 - xx	104 - xx	44 x 104	3380
25	LSA36-70-32-44104	7000	7	25	32	44 - xx	104 - xx	44 x 104	3380
25	LSA36-80-32-44104	8000	7	25	32	44 - xx	104 - xx	44 x 104	3380
25	LSA36-90-32-44104	9000	7	25	32	44 - xx	104 - xx	44 x 104	3380
25	LSA36-100-32-44104	10000	7	25	32	44 - xx	104 - xx	44 x 104	3380
25	LSA36-110-32-44104	11000	7	25	32	44 - xx	104 - xx	44 x 104	3380
25	LSA36-120-32-44104	12000	7	25	32	44 - xx	104 - xx	44 x 104	3380
25	LSA36-130-32-44104	13000	7	25	32	44 - xx	104 - xx	44 x 104	3380
25	LSA36-140-32-44104	14000	7	25	32	44 - xx	104 - xx	44 x 104	3380
25	LSA36-150-32-44104	15000	7	25	32	44 - xx	104 - xx	44 x 104	3380
25	LSA36-160-32-44104	16000	7	25	32	44 - xx	104 - xx	44 x 104	3380
25	LSA36-170-32-44104	17000	7	25	32	44 - xx	104 - xx	44 x 104	3380
25	LSA36-180-32-44104	18000	7	25	32	44 - xx	104 - xx	44 x 104	3380
25	LSA36-190-32-44104	19000	7	25	32	44 - xx	104 - xx	44 x 104	3380
25	LSA36-200-32-44104	20000	7	25	32	44 - xx	104 - xx	44 x 104	3380

Values rounded to the nearest 1", see drawing for actual dimensions.

Notes

- 1 Ship weights are estimated and do not include oversize platforms or options
- 2 Maximum air bag pressure is 50 psi or 100 psi depending on air bag type
- 3 Recommended air line feed pressure is 70 psi to 100 psi
- 4 Air consumption is 5 cubic feet per minute (cfm) on average based on cycle rate
See the EnKon Systems website for how to calculate cfm for your application
URL: <http://enkon.pro/blog/calculating-cfm-and-scfm-for-pneumatic-scissor-lift-tables/>
- 5 Width and length dimensions reference the main structure of the lift system and do not include structures such as floor tabs, bolt heads, etc. See drawing for actual dimensions
- 6 Surface finishes are either powder coat or low-VOC quick-dry two-stage spray-on primer coat and hard enamel top coat
- 7 Lifts must be center loaded when at full capacity
- 8 Side and end load capacities are derated 2% per inch of increase top plate size from base size
- 9 Safety bellow skirting option must be purchased to meet ANSI and OSHA standards